


DETAIL A

(Contraction Joint for reinforced slabs)

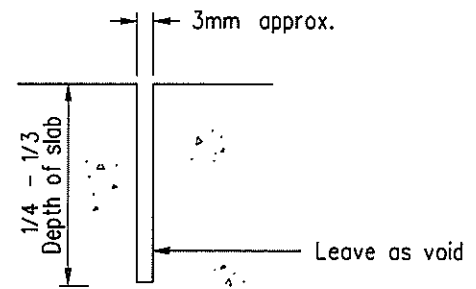


DETAIL B

(Contraction Joint for unreinforced slabs)

Joint spacing (m)	Width W (mm)	Depth D (mm)
Joint spacing ≤ 10	10	See Note 2
$10 < \text{Joint spacing} \leq 15$	20	
$15 < \text{Joint spacing} \leq 20$	25	

(FOR DETAIL A ONLY)

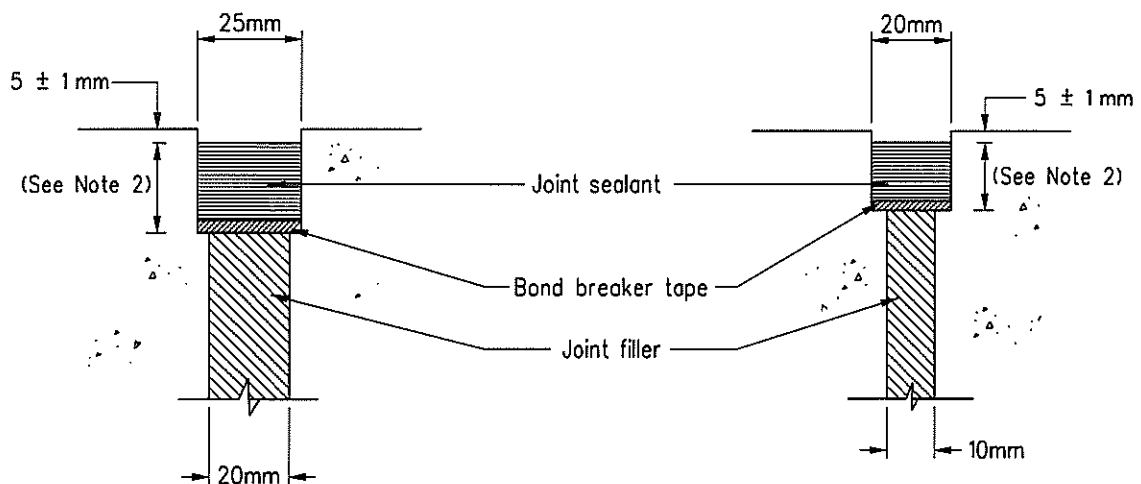

DETAIL C

(Expansion Joint)

DETAIL D

(Isolation Joint)

Notes:

1. Initial saw cut shall be omitted when slabs are not cast through the joint.
2. The depth of the joint sealant and bond breaker tape shall be in accordance with the manufacturer's recommendations.

A	General Revision		June 04
	Former Drg. No. H1004A with general revision		June 94
REF.	REVISION	SIGNATURE	DATE

DETAILS OF
JOINT GROOVE FOR
TRANSVERSE JOINTS

HIGHWAYS DEPARTMENT

REFERENCE

SCALE

DIAGRAMMATIC

DRAWING No.

EVA/SK07
H-1109A

CAD